

VUKA CRETE MD ESD

DESCRIPTION

Vuka Crete MD ESD is a multi-component, water based polyurethane compound incorporating antimicrobial agents, flow applied at 4mm thickness. It is specifically formulated to function as an electrostatic dissipative flooring system.


USES

Vuka Crete MD ESD is an anti-static floor system ideal for areas subject to heavy wear but requiring a smooth easily cleanable surface. Used in a variety of environments requiring ESD flooring including electronics production and assembly areas, computer server rooms as well as paints and solvent storage areas.

BENEFITS

- Meets ANSI/ESD STM7.1-2013
- ESD performance range
- $1 \times 10^6 < \text{ESD Floor} \leq 1 \times 10^9$ ohms
- Non-tainting, quick curing
- Monolithic seamless finish
- High abrasion and impact resistant
- Easy to clean and sterilize
- Available in a standard colour range
- Temperature resistant to wet 60 C and light steam cleaning
- Resistant to a broad range of chemicals

ILLUSTRATION

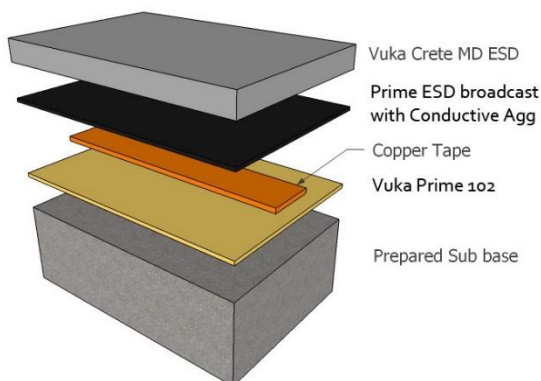

grey dark grey yellow red



sahara green ferrari blue

Product colours will differ slightly and it is best to obtain actual colour samples where required.

VUKA CRETE MD ESD

ANTI MICROBIAL ADDITIVE

The ULTRA FRESH anti-microbial additive incorporated into Vuka Crete MD ESD inhibits the growth of most bacteria and fungi in contact with the floor. This results in a daily hygienic advantage through the use of anti-microbial technology. It is intended to compliment good housekeeping practices and a suitable cleaning regime.

CHEMICAL RESISTANCE

For chemical resistance information please contact our Technical Department

TYPICAL PROPERTIES

The following are typical properties achieved at 20C and 50% relative humidity.

Light traffic @ 20°C	24hrs
Heavy traffic @ 20°C	2 Days
Full cure @ 20°C	7 Days
Compressive strength	>50Mpa SABS 863:1994
Tensile strength	>10Mpa SABS 1253:1994
Flexural strength	>20Mpa SABS 864:1994
Hardness Shore D	80
Impact Resistance	ISO6272-1:2011 1kg weight >1.8m 2kg weight >1.5m
Temperature 4mm	-15 C to 85 C
Water absorption	Nil – Contest test. (Impermeable)
Bond Strength	Greater than cohesive strength of 25N/mm ² concrete > 1.5 N/mm ² Proceq Dyna

SURFACE REQUIREMENTS

Concrete / Grano surfaces must have a minimum compressive strength of 25N/mm², a minimum tensile strength of 1.5N/mm², be at least 40mm thick. The substrate must be dry, free of oils waxes fats and other contaminants. Vacu-blasting, scarification, abrasive grinding followed by vacuum cleaning is preferred. The surface must show open pores throughout with exposed aggregate. **Acid etching is not acceptable.** It is mandatory to cut

grooves into the subfloor to minimise temperature and shrinkage stress. Typically 5mm x 5mm, 150mm from and running parallel with walls, plinths, columns and any finished edge such as expansion joints.

PRIMING

The prepared substrate must be sealed with Vuka Prime 102, porous floors might require two coats. Apply copper tape and prime with Vuka Prime ESD and broadcast with Vuka Conductive Aggregate. All in strict accordance with Vuka Floors literature.

MIXING

Vuka Crete MD ESD is a pre weighed kit for optimum performance and must not be split. Into a rotary pan mixer empty Part A, Part B, fibres and pigment components. Mix to an even consistency for about 45 seconds. Gradually add the aggregates and mix for 3 minutes until a fully wetted lump free mixture is obtained.

APPLICATION

Vuka Crete MD ESD is poured evenly over the appropriate area to be covered, spread the mix evenly with the appropriate size notched rake to the specified thickness. Immediately roll with a spiked roller to even and de-aerate the floor system.

PRODUCTS REQUIRED

This system is built up as follows
Vuka Prime 102
Copper Tape
Prime ESD broadcast with Conductive Aggregate
Vuka Crete MD ESD

COLOUR STABILITY

This product is not colour fast and will change colour over time especially when exposed to direct sunlight and high intensity lighting. Exhibits a yellowing effect most noticeable in the grey. The discolouring does not compromise the products chemical resistance or physical characteristics.

VUKA CRETE MD ESD

CURING

At 25C constant, excessive traffic, aqueous contact and exposure to aggressive chemicals should only take place after 7 days when full cure has been achieved. At 10C constant, full cure would take a minimum of 12 days

STORAGE

If stored in original, unopened and undamaged sealed containers in dry conditions at temperatures between +10 C and +25 C.

Vuka Prime 102: 12 months from date of production.

Vuka Prime ESD: 12 months from date of production.

Vuka Crete Part A & B: 12 months from date of production.

Vuka Crete ESD Part C: 8 months from date of production. Must be protected from humidity.

HEALTH AND SAFETY

Use of basic principles of industrial hygiene and protective clothing such as gloves, goggles, masks will enable the product to be used safely. Splashes into eyes should be washed immediately with clear water and medical advice sought.

BILL OF QUANTITY DESCRIPTIONS

Contact Vuka Floors for a detailed bill description to suit your specific requirements.

MODEL SPECIFICATION

Prepare surface and install Vuka Crete MD ESD water based polyurethane floor compound system 4mm thick in strict accordance with the technical data obtainable from Vuka Floors. All work to be done by Vuka Floors approved applicators.

REFERENCE PANEL

A reference sample should be installed by the applicator prior to the start of the contract to ensure correct coverage, workmanship and

acceptance by the client as a standard for the project.

FURTHER INFORMATION

This product will change in colour over time. Especially when subject to high levels of UV and or chemical attack. For best colour stability consult our technical department. This does not compromise the products physical and chemical resistance characteristics.

Vuka Floors products are guaranteed against defective materials and manufacture and are sold subject to its Terms and Conditions which may not be overridden in any other legal documentation.

Whilst any information contained herein is true, accurate and represents our best knowledge and experience at the date of issuance it is subject to change without prior notice. User must contact Vuka Floors to verify correctness before specifying or ordering. No warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.

Figures given for consumption / spread rates are theoretical and do not allow for additional materials due to surface profile, porosity, variations in level and wastage etc.