

VUKA CRETE RT

DESCRIPTION

Vuka Crete RT is a multi-component, water based polyurethane compound incorporating antimicrobial technology for industries requiring high strength, heavy duty chemical resistant floors. Trowel applied at between 6mm and 9mm thickness with an anti slip texture.



USES

Typically specified for aggressive, wet, high performance and chemical environments such as abattoirs, dairies, food & beverage plants, workshops, warehouses, prisons, kitchens and the like.

BENEFITS

- Non-tainting, quick curing
- Monolithic seamless finish
- High abrasion and impact resistant
- Resistant to a broad spectrum of chemicals
- Anti-slip surface
- Anti-microbial technology
- Withstands high mechanical loads
- Standard colour range
- Heat resistant 9mm to 120°C
- Can tolerate steam cleaning

ILLUSTRATION

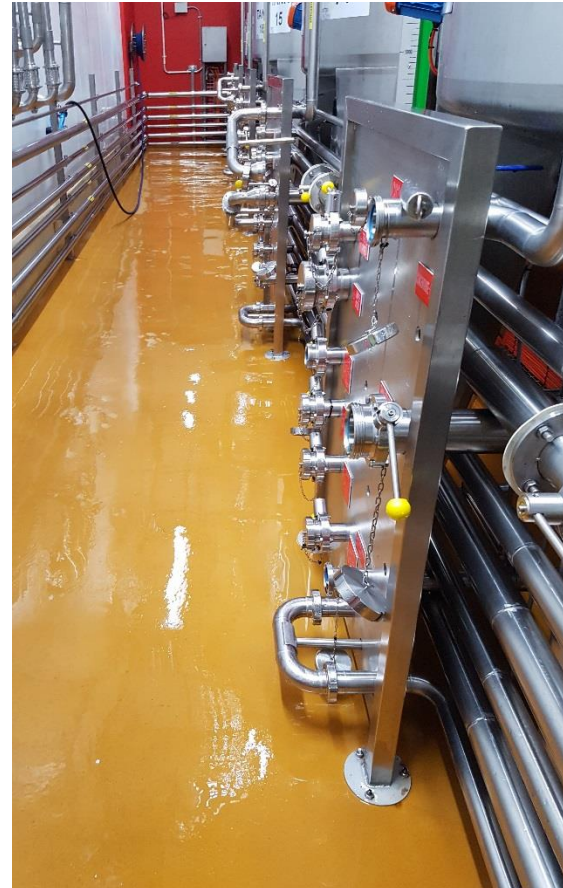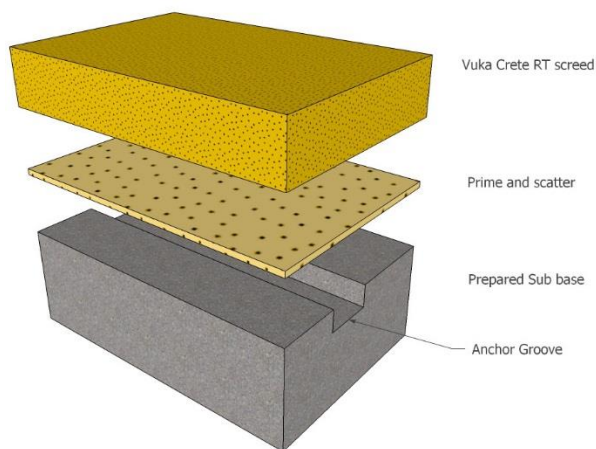

grey dark grey yellow red



sahara green ferrari blue

Product colours will differ slightly and it is best to obtain actual colour samples where required.

VUKA CRETE RT

ANTI MICROBIAL ADDITIVE

The ULTRA FRESH anti-microbial additive incorporated into Vuka Crete RT inhibits the growth of most bacteria and fungi in contact with the floor. This results in a daily hygienic advantage through the use of anti-microbial technology. It is intended to compliment good housekeeping practices and a suitable cleaning regime.

COLOUR STABILITY

This product is not colour fast and will change colour over time especially when exposed to direct sunlight and high intensity lighting. Exhibits a yellowing effect most noticeable in the grey. The discolouring does not compromise the products chemical resistance or physical characteristics.

CHEMICAL RESISTANCE

For chemical resistance information please contact our Technical Department

PROPERTIES

The following are typical properties achieved at 20C and 50% relative humidity

Light traffic @ 20°C	24hrs
Heavy traffic @ 20°C	2 Days
Full cure @ 20°C	7 Days
Compressive strength	>60Mpa SABS 863:1994
Tensile strength	>10Mpa SABS 1253:1994
Flexural strength	>20Mpa SABS 864:1994
Hardness Shore D	80
Impact Resistance	ISO6272-1:2011 1kg weight >1.8m 2kg weight >1.5m
Water absorption	Nil – Contest test. (Impermeable)
Bond Strength	Greater than cohesive strength of 25N/mm ² concrete > 1.5 N/mm ² Proceq Dyna
Temperature resistance	6mm -25 °C to 100 °C
Temperature resistance	9mm -40 °C to 120 °C

SURFACE REQUIREMENTS

Concrete / Grano surfaces must have a minimum compressive strength of 25N/mm², a minimum tensile strength of 1.5N/mm², be at least 40mm thick. The substrate must be dry, free of oils waxes fats and other contaminants. Vacu-blasting, scarification, abrasive grinding followed by vacuum cleaning is preferred. The surface must show open pores throughout with exposed aggregate. **Acid etching is not acceptable.** It is mandatory to cut grooves into the subfloor to minimise temperature and shrinkage stress. Typically 8mm x 8mm, 150mm from and running parallel with walls, plinths, columns and any finished edge such as expansion joints.

PRIMING

Priming is not normally required. When required one of the below options are to be used.

Apply Vuka Crete MD as a scrapper coat.
Apply Vuka Crete Primer at 4m²/L.
Apply Vuka Prime 102 at 4m²/L which must be broadcast with Scatter sand (0.8mm to 1.2mm) aggregate into wet primer at 0.5kg/m². Allow to cure and vacuum off all unbound aggregate.
Note: Porous floors might require two coats.

MIXING

Vuka Crete RT is a pre weighed kit for optimum performance and must not be split. Into a rotary pan mixer empty the base hardener and pigment components. Mix to an even consistency for about 30 seconds. Gradually add the aggregate and mix for 3 minutes until a fully wetted lump free mixture is obtained.

APPLICATION

Vuka Crete RT is poured evenly over the appropriate area to be covered, spread the mix evenly with a plastic trowel. The preferred application is to use a screed applicator preset to the specified thickness, laying the screed 70cm to

VUKA CRETE RT

80cm wide. Close surface with a plastic trowel. Use a mohair or textured roller in gentle sweeps in one direction over the surface to provide the desired finish. Avoid excessive rolling as it could lead to surface pin holing and reduced slip resistance.

CURING

At 25C constant, excessive traffic, aqueous contact and exposure to aggressive chemicals should only take place after 7 days when full cure has been achieved. At 10C constant, full cure would take a minimum of 12 days.

STORAGE

If stored in original, unopened and undamaged sealed containers in dry conditions at temperatures between +10 C and +25 C.
Part A, B & D: 12 months from date of production.
Part C: 8 months from date of production. Must be protected from humidity.

HEALTH AND SAFETY

Use of basic principles of industrial hygiene and protective clothing such as gloves, goggles, masks will enable the product to be used safely. Splashes into eyes should be washed immediately with clear water and medical advice sought.

BILL OF QUANTITY DESCRIPTIONS

Contact Vuka Floors for a detailed bill description to suit your specific requirements.

MODEL SPECIFICATION

Prepare surface and prime with Vuka Crete Primer at 4m²/L and then install Vuka Crete RT water based polyurethane compound 6mm thick in strict accordance with the technical data obtainable from Vuka Floors. All work to be done by Vuka Floors approved applicators.

REFERENCE PANEL

A reference sample should be installed by the applicator prior to the start of the contract to ensure correct coverage, workmanship and acceptance by the client as a standard for the project.

FURTHER INFORMATION

This product will change in colour over time. Especially when subject to high levels of UV and or chemical attack. For best colour stability consult our technical department. This does not compromise the products physical and chemical resistance characteristics.

Vuka Floors products are guaranteed against defective materials and manufacture and are sold subject to its Terms and Conditions which may not be overridden in any other legal documentation.

Whilst any information contained herein is true, accurate and represents our best knowledge and experience at the date of issuance it is subject to change without prior notice. User must contact Vuka Floors to verify correctness before specifying or ordering. No warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.

Figures given for consumption / spread rates are theoretical and do not allow for additional materials due to surface profile, porosity, variations in level and wastage etc.