

## VUKA CRETE SL

### DESCRIPTION

Vuka Crete SL is a multi component flow applied, water based polyurethane compound incorporating antimicrobial agents, between 2mm and 3mm thickness.

### USES

Ideally suited for use in aggressive environments including chemical process areas, food & beverage industries, dairies, abattoirs, engineering workshops and warehouses.


### BENEFITS

- Non-tainting, quick curing
- Monolithic seamless finish
- High abrasion and impact resistant
- Easy to clean and sterilize
- Available in a standard colour range
- Temperature resistant to wet 60 C and light steam cleaning
- Resistant to a broad range of chemicals

### CHEMICAL RESISTANCE

For chemical resistance information please contact our Technical Department

### ILLUSTRATION

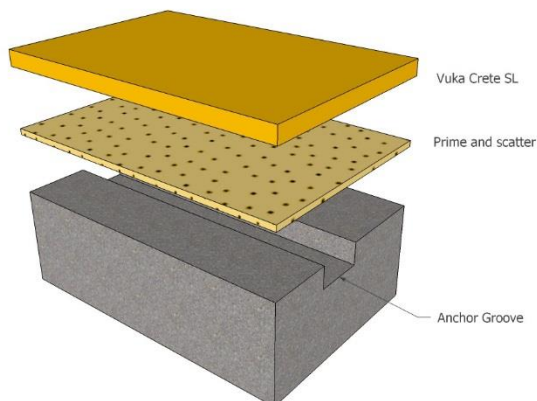

Product colours will differ slightly and it is best to obtain actual colour samples where required.

## VUKA CRETE SL

### ANTI MICROBIAL ADDITIVE

The ULTRA FRESH anti-microbial additive incorporated into Vuka Crete SL inhibits the growth of most bacteria and fungi in contact with the floor. This results in a daily hygienic advantage through the use of anti-microbial technology. It is intended to compliment good housekeeping practices and a suitable cleaning regime.

### COLOUR STABILITY

This product is not colour fast and will change colour over time especially when exposed to direct sunlight and high intensity lighting. Exhibits a yellowing effect most noticeable in the grey. The discolouring does not compromise the products chemical resistance or physical characteristics.

### PROPERTIES

The following are typical properties achieved at 20C and 50% relative humidity

Light traffic @ 20°C	24hrs
Heavy traffic @ 20°C	2 Days
Full cure @ 20°C	7 Days
Compressive strength	>50Mpa SABS 863:1994
Tensile strength	>9Mpa SABS 1253:1994
Flexural strength	>20Mpa SABS 864:1994
Hardness Shore D	80
Heat resistance	Up to 70 °C
Water absorption	Nil – Contest test. (Impermeable)
Bond Strength:	Greater than cohesive strength of 25N/mm <sup>2</sup> concrete > 1.5 N/mm <sup>2</sup> Proceq Dyna

### SURFACE REQUIREMENTS

Concrete / Grano surfaces must have a minimum compressive strength of 25N/mm<sup>2</sup>, a minimum tensile strength of 1.5N/mm<sup>2</sup>, be at least 40mm thick. The substrate must be dry, free of oils waxes fats and other contaminants. Vacu-blasting, scarification, abrasive grinding followed by vacuum cleaning is preferred. The surface must show open pores throughout with exposed aggregate. **Acid**

**etching is not acceptable.** It is mandatory to cut grooves into the subfloor to minimise temperature and shrinkage stress. Typically 5mm x 5mm, 150mm from and running parallel with walls, plinths, columns and any finished edge such as expansion joints.

### PRIMING

The prepared substrate must be sealed by one of the below options.

Apply Vuka Crete SL as a scrapper coat.

Apply Vuka Crete Primer.

Apply Vuka Prime 102 which must be broadcast with 45/55 (0.3mm to 0.5mm) aggregate into wet primer at 0.5kg/m<sup>2</sup>. Allow to cure and vacuum off all unbound aggregate.

Note: Porous floors might require two coats.

### MIXING

Vuka Crete SL is a pre weighed kit for optimum performance and must not be split. Pre stir base and activator. Add the base, hardener and pigment components and mix to an even consistency for about 30 seconds. Gradually add the aggregate and mix for 3 minutes using a slow speed drill (+- 300rpm) fitted with a spiral blade until a fully wetted lump free mixture is obtained.

### APPLICATION

Vuka Crete SL is poured evenly over the appropriate area to be covered, spread the mix evenly with the appropriate size serrated trowel or rakes to the specified thickness. Immediately roll with a spiked roller to even and de-aerate the floor system.

### CURING

At 25C constant, excessive traffic, aqueous contact and exposure to aggressive chemicals should only take place after 7 days when full cure has been achieved. At 10C constant, full cure would take a minimum of 12 days.

## **VUKA CRETE SL**

### **STORAGE**

If stored in original, unopened and undamaged sealed containers in dry conditions at temperatures between +10C and +25C.

Part A & B: 12 months from date of production.

Part C: 8 months from date of production. Must be protected from humidity.

### **HEALTH AND SAFETY**

Use of basic principles of industrial hygiene and protective clothing such as gloves, goggles, masks will enable the product to be used safely. Splashes into eyes should be washed immediately with clear water and medical advice sought.

### **BILL OF QUANTITY DESCRIPTIONS**

Contact Vuka Floors for a detailed bill description to suit your specific requirements.

### **MODEL SPECIFICATION**

Prepare surface and install Vuka Crete SL water based polyurethane floor compound 2mm thick in strict accordance with the technical data obtainable from Vuka Floors. All work to be done by Vuka Floors approved applicators.

### **REFERENCE PANEL**

A reference sample should be installed by the applicator prior to the start of the contract to ensure correct coverage, workmanship and acceptance by the client as a standard for the project.

### **FURTHER INFORMATION**

This product will change in colour over time. Especially when subject to high levels of UV and or chemical attack. For best colour stability consult our technical department. This does not compromise the products physical and chemical resistance characteristics.

Vuka Floors products are guaranteed against defective materials and manufacture and are sold subject to its Terms and Conditions which may not be overridden in any other legal documentation.

Email: [info@vukafloors.co.za](mailto:info@vukafloors.co.za)

Revision date: August 2022

Whilst any information contained herein is true, accurate and represents our best knowledge and experience at the date of issuance it is subject to change without prior notice. User must contact Vuka Floors to verify correctness before specifying or ordering. No warranty is given or implied with any recommendations made by us, our representatives or distributors, as the conditions of use and the competence of any labour involved in the application are beyond our control.

Figures given for consumption / spread rates are theoretical and do not allow for additional materials due to surface profile, porosity, variations in level and wastage etc.